


Welded Crank Link Mill Chains

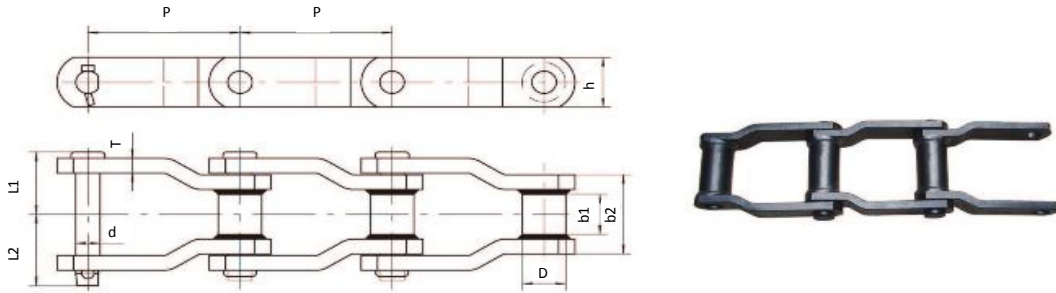

CHAIN	Pitch p mm	Narrow end		Bush Diameter D(Max) mm	Sidebars		Pin			Ultimate tensile strength Fu (min) kN	Rated working load kN	Weight per metre q kg/m
		b1 (min) mm	b2 (max) mm		h mm	T mm	d mm	L1 mm	L2 mm			
WR124	101.6	38.1	71.5	31.8	38.1	9.5	19.05	52.0	56.0	204	20.5	11.5
WH124	101.6	38.1	71.5	31.8	38.1	9.5	19.05	52.0	56.0	320	32.7	11.5
WHX124	101.6	38.1	71.5	36.55	38.1	9.5	19.05	51.8	56.2	320	32.7	12.5
WR111	120.9	50.8	85.6	31.8	44.5	9.5	19.05	59.4	63.3	270	32.5	13.0
WH111	120.9	50.8	85.6	31.8	44.5	9.5	19.05	59.4	63.3	320	39.5	13.0
WHX111	120.9	50.8	85.6	36.55	38.1	9.5	19.05	58.7	64.5	320	39.5	12.5
WR106	152.4	38.1	71.5	31.8	38.1	9.5	19.05	52.0	56.0	204	20.5	9.6
WH106	152.4	38.1	71.5	31.8	38.1	9.5	19.05	52.0	56.0	320	32.7	9.6
WHX106	152.4	38.1	71.5	36.55	38.1	9.5	19.05	51.8	56.2	320	32.7	9.7
WH720	152.4	28.5	55.0	32.0	40.0	10.0	19.05	44.5	49.5	350	35.8	9.7
WR110	152.4	44.5	76.5	31.8	38.1	9.5	19.05	54.4	59.6	204	20.5	9.6
WH110	152.4	44.5	76.5	31.8	38.1	9.5	19.05	54.4	59.6	320	32.7	9.6
WR132	153.67	69.85	111.6	44.5	50.8	12.7	25.4	77.3	81.7	345	42.5	21.1
WHX132	153.67	69.85	111.6	44.5	50.8	12.7	25.4	77.3	81.7	540	66.8	20.4
WR150	153.67	69.85	111.6	44.5	63.5	12.7	25.4	77.3	81.7	345	42.5	24.9
WHX150	153.67	69.85	111.6	44.5	63.5	12.7	25.4	77.3	81.7	540	66.8	24.5
WHX155	153.67	69.85	112.1	44.5	63.5	14.3	28.4	77.4	87.5	660	77.8	27.7
WHX157	153.67	69.85	118.1	44.5	63.5	15.9	28.55	81.4	92.6	750	80.9	29.3
WHX159	155.58	73.0	118.1	50.8	76.2	15.9	31.5	83	84.8	930	90.0	38.4
WHX4855	304.8	69.85	116.9	44.5	63.5	15.9	31.55	81.8	84.3	780	76.8	22.5
WHX4859	304.8	73.0	118.1	50.8	76.2	15.9	31.5	83	84.8	930	87.5	28.9

Sprockets Australia has made every attempt to ensure data above is accurate however accepts no liability for inaccuracies or damage caused.

- WR chains have all pins heat treated.
- WH chains have all parts heat treated.
- WHX chains have all parts heat treated and pin surface induction hardened.