


Transfer Chain – 81X, 81XH, 81XHH

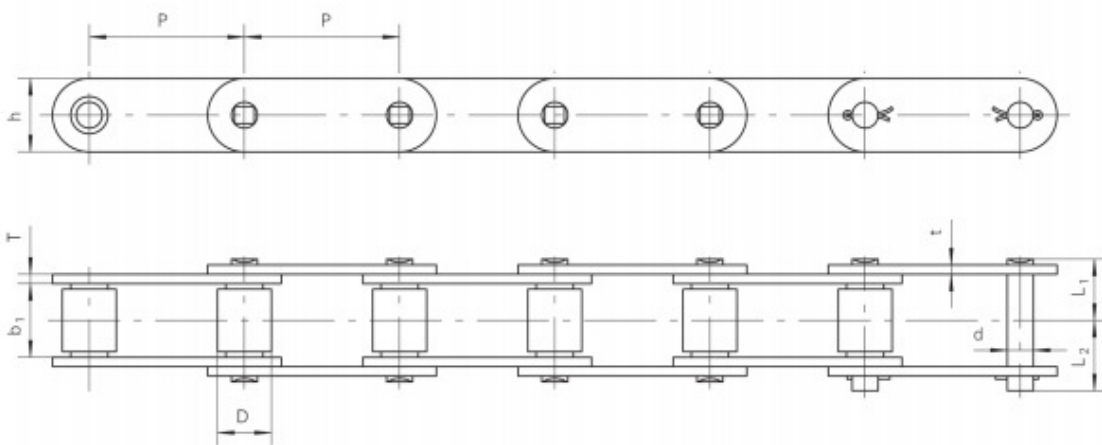

| 链号 | 节距 | 内节内宽 | 滚子外径 | 销轴 | | | 链板 | | 最小抗拉强度 | 平均拉伸强度 | 每米重量 |
|-----------|-------|--------------------------------|-----------------|------|----------------|----------------|-----------|---------|---------------------------|--------------------------|------------------|
| Chain No. | Pitch | Width Between inner Sideplates | Roller diameter | Pin | | | Sideplate | | Ultimate tensile strength | Average tensile strength | Weight per meter |
| | P | b ₁ (min) | D(max) | d | L ₁ | L ₂ | h | t/T | F _u (min) | Q ₀ | q |
| | mm | mm | mm | mm | mm | mm | mm | mm | kN | kN | kg/m |
| 81X | 66.27 | 26.99 | 23.02 | 11.1 | 24.5 | 27.8 | 28.6 | 4 | 106.7 | 128 | 3.8 |
| 81XH | 66.27 | 26.99 | 23.02 | 11.1 | 29.6 | 32.7 | 31.4 | 5.6/7.5 | 152 | 175 | 5.83 |
| 81XHH | 66.27 | 26.99 | 23.02 | 11.1 | 31.5 | 34.8 | 31.4 | 7.5 | 186.7 | 205 | 6.47 |
| 81XA | 66.27 | 38 | 23.02 | 11.1 | 30.4 | 33.6 | 28.6 | 4 | 132 | 145 | 4.30 |
| 81-XH | 66.27 | 26.99 | 23.02 | 11.1 | 30.1 | 33.2 | 32.1 | 5.6/8 | 152 | 175 | 6.11 |
| 81-XHH | 66.27 | 27.84 | 23.02 | 11.1 | 32.9 | 36.2 | 32.1 | 8 | 186.7 | 205 | 6.97 |
| 81X-KC | 66.27 | 26.99 | 23.02 | 11.1 | 25.13 | 28.43 | 28.6 | 4 | 98 | 147 | 3.82 |
| 81XXH | 66.27 | 26.99 | 23.02 | 11.1 | 31.5 | 34.8 | 31.4 | 7.5 | 152 | 175 | 6.47 |
| *81XH-SAS | 66.27 | 26.99 | 23.02 | 11.1 | 29.6 | 32.7 | 31.4 | 5.6/7.5 | 105 | 115 | 5.54 |
| **81XSS | 66.27 | 26.99 | 23.02 | 11.1 | 24.5 | 27.8 | 28.6 | 4 | 43 | 47 | 3.76 |
| **81XHSS | 66.27 | 26.99 | 23.02 | 11.1 | 29.6 | 32.7 | 31.4 | 5.6/7.5 | 105 | 115 | 5.74 |

SPROCKETS AUSTRALIA PTY LTD | 216 WHITEHALL STREET | YARRAVILLE, VICTORIA 3013

P: (03) 9687 8177 | F: (03) 9687 8527 | E: sales@sprocketsoz.com.au

www.sprocketsoz.com.au