


MR Series Agricultural Roller Chain.

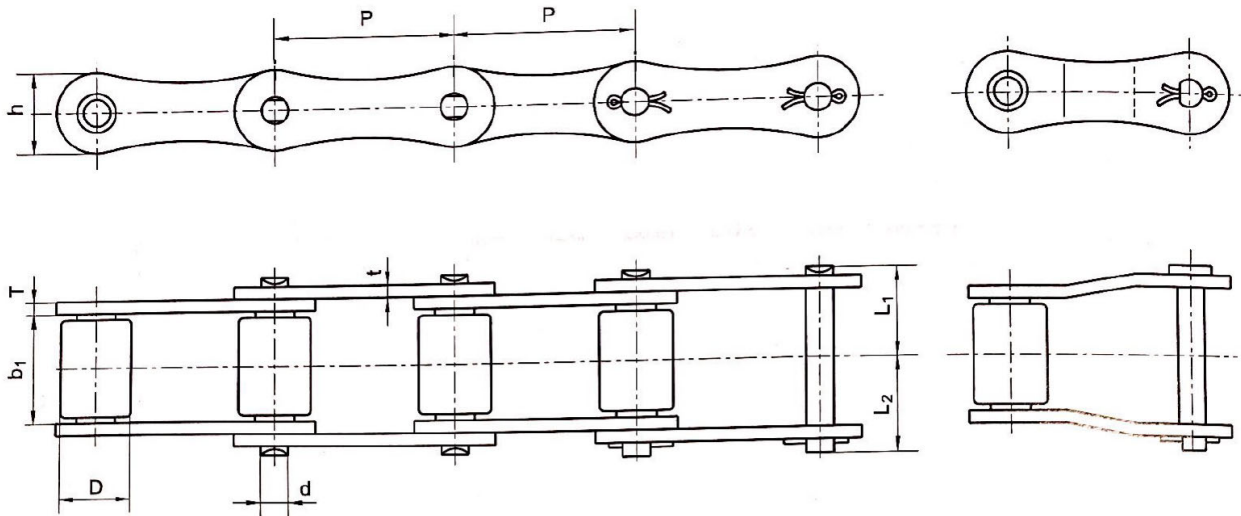

CHAIN No.	PITCH P mm	Width Between Inner plates B1 (min) mm	Roller Diameter D (max) mm	PIN			PLATE		Ultimate Tensile Strength Qmin kN	Average Tensile Strength Q0 kN	Weight Per Metre q kg/m
				d mm	L1 mm	L2 mm	h mm	t/T mm			
S32	29.21	16.25	11.43	4.45	13.35	15.65	13.4	1.8	8	21	0.92
S42	34.93	19.76	14.27	7.01	17.1	20	19.7	2.62	26.7	48	1.84
S45	41.40	22.95	15.24	5.74	18.45	20.45	17.2	2.62	17.8	35	1.59
S51	38.1	16	15.24	5.74	15	17	17.2	2.62	17.8	35	1.42
S52	38.1	22.95	15.24	5.74	18.45	20.45	17.2	2.62	17.8	35	1.78
S52LV	38.1	18.2	15.2	6.92	16.7	19.5	16.3	2.62/3	30	40	1.52
S55	41.4	22.95	17.78	5.74	18.45	20.45	17.2	2.62	17.8	35	1.87
S62	41.91	26.1	19.05	5.74	20	22.1	17.2	2.62	26.7	35	2.17
S77	58.34	22.7	18.26	8.92	21.65	25.15	25.8	4	44.5	72	2.69
S88	66.27	28.58	22.86	8.92	24.85	28.35	26	4	44.5	72	3.22
S88-N1	66.27	28.58	30	8.92	24.85	28.35	26	4	44.5	72	4.22
S413	41.3	21.4	16	8.28	19.55	22.85	20	3.2	42	58	2.04
S414	41.4	22.23	17.9	8.28	19.55	22.85	20	3.2	42	58	2.24
S414-N1	41.4	22.23	17.78	8.28	19.55	23.65	20	3.2	45.4	58	2.22
S41.91	41.91	19.4	17	7.92	18.7	21.3	24.5	3.2	67	70	2.34
A550	41.4	20.1	16.7	7.16	17.25	20.05	19.05	2.62	39.1	48.5	1.78
A557	41.4	20.1	17.78	7.92	18.55	21.15	23.1	3.2	55.6	70	2.46
A620	42.01	24.51	17.91	7.16	20.75	23.45	19.05	3.2	39.1	55	2.29